


Solution 2000 & 3000 Control Panels

www.boschsecurity.com.au



BOSCH
Invented for life

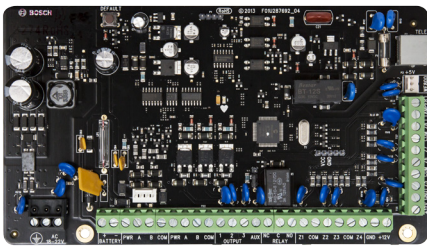

- ▶ 8/16 Fully Programmable Zones
- ▶ 41 Codes – 1 Installer, 20 User Codes, 20 RF Keyfobs
- ▶ 16 Wireless Devices (on Solution 3000)
- ▶ Partitionable into 2 Separate Areas
- ▶ STAY / AWAY Arming Options

The Solution 2000 and Solution 3000 are new generation alarm control panels for the Australian & New Zealand residential & commercial markets.

System Overview

Supporting up to 8 fully programmable zones on the Solution 2000 and 16 fully programmable zones on the Solution 3000, this range of intrusion panels is suitable for any home, and even some commercial premises.

With support for up to four codepads on both panels and the ability to be split in to two separate partitions on the Solution 3000, you have the flexibility of one security system that can act as two.

Functions

User Interfaces

The Solution 2000 & 3000 control panels have a variety of keypad options, including LCD Icon, LCD Alphanumeric, and various touchscreen options that are simple to use.

Wireless

The Solution 2000 supports the WE800EV2 wireless receiver for wireless keyfob control, while the Solution 3000 supports both the WE800EV2 and the option to integrate with the Bosch RADION range of wireless transmitters.

Communication

Solution 2000 & 3000 also have available a range of communications extension modules that integrate directly with the panel and provide options such as mobile communications via the GSM & GPRS networks, along with IP reporting through the Internet.

The IP module includes CSV-IP communications technology and makes the panels fully NBN ready with the majority of monitoring centres in Australia & New Zealand able to handle the IP communications from the Solution 2000 & 3000.

Remote Security Control (RSC) app

The Solution 2000 & 3000 panels support the Bosch Remote Security Control (RSC) app, enabling convenient system operation from an iPhone, iPad or iPod Touch, including arming / disarming of the system and control of connected devices, such as lighting and A/C.

Certifications and approvals

Australia:	RCM
New Zealand:	Tele-permit
Europe:	CE - EN61000-3:2007/A1:2011 EN501030-4:2011AS/CA S002:2010

Technical specifications

Enclosure

Dimensions (H x W x D): (packed in carton)	306 mm x 262 mm x 84 mm
Weight:	2.5 kg
Warranty:	3 years

Environmental Considerations

Relative Humidity:	10% to 95% non-condensing
Temperature:	0°C to +45°C

Power Requirements

Primary:	240 VAC / 18 VAC at 1.3A supplied by TF008 Plug Pack
Secondary:	12VDC, 6.5Ah from a re-chargeable sealed lead/acid battery

Communications

Communication:	CID, SIA, Email*, Domestic Dialling, CSV-IP *Requires B426 IP Communications Module or B450 Universal Communications Module
----------------	--

Ordering information

ICP-SOL2-P Solution 2000 Control Panel
Includes control panel PCB only
Order number **F.01U.292.968**

ICP-SOL3-P Solution 3000 Control Panel
Includes control panel PCB only
Order number **F.01U.292.967**

Accessories

IUI-SOL-ICON LCD Icon Keypad
Order number **F.01U.301.794**

IUI-SOL-TEXT LCD Text Keypad
Order number **F.01U.301.795**

IUI-SOL-TS4 4.3" Touchscreen Keypad
Order number **F.01U.303.251**

IUI-SOL-TS7 7" Premium Touchscreen Keypad
Order number **F.01U.303.249**

B208 Octo-Input Expansion Module
Order number **F.01U.172.935**

B308 Octo-Output Expansion Module
Order number **F.01U.172.936**

B426 IP Communications Module
Order number **F.01U.265.967**

B450 Universal Communications Module
Order number **F.01U.283.050**

B442 2G GPRS Plug-In Module
Order number **F.01U.283.090**

B443 3G GPRS Plug-In Module
Order number **F.01U.283.091**

B810 RADION Receiver
Order number **F.01U.253.603**

RFGM RADION Glassbreak
Order number **F.01U.253.606**

RFSM RADION Smoke Detector
Order number **F.01U.253.607**

RFKF-FB RADION Keyfob Four Button
Order number **F.01U.253.609**

RFDW-SM RADION Surface Door/Window Contact
Order number **F.01U.253.611**

RFDW-RM RADION Recessed Door/Window Contact
Order number **F.01U.253.612**

RFPB-TB RADION Panic Two Button
Order number **F.01U.253.613**

RFDL-11 RADION PIR TriTech
Order number **F.01U.253.614**

RFPR-12 RADION PIR
Order number **F.01U.253.615**

RFRP RADION Repeater
Order number **F.01U.253.616**

RFPB-SB RADION Panic One Button
Order number **F.01U.253.618**

RFUN RADION Universal Transmitter
Order number **F.01U.253.619**

RFBT RADION Bill Trap
Order number **F.01U.253.614**

RFPR-C12 RADION Curtain PIR
Order number **F.01U.256.387**

MW250 Metal Enclosure
Order number **F.01U.271.828**